

# WESTEND

## RADIATORS

### Radiator/Oil Cooler:

#### Square Wave 12mm

10 FPI or 7.5 FPI  
16.25mm or .625" tube centres



Core Thickness	Rows	Tube Size	Gap
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.625"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5"	2	2"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

#### Square Wave 8mm

10 FPI or 7.5 FPI  
12.25mm or .4844" tube centres



Core Thickness	Rows	Tube Size	Gap
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.625"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5"	2	2"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

### Dimpled 10mm

8 FPI

14.25mm or .5625" tube centres




Core Thickness	Rows	Tube Size	Gap
1.625"	1	1.625"	-
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.625"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5"	2	2"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

### Louvered 10mm

12 FPI

14.25mm or .5625" tube centres

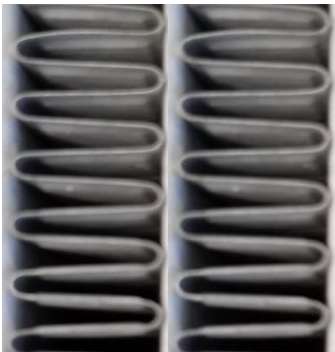

Core Thickness	Rows	Tube Size	Gap
1.625"	1	1.625"	-
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.625"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5"	2	2"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

## CAC:

### Square Wave 12mm

10 FPI or 7.5 FPI

19mm or .75" tube centres



Core Thickness	Rows	Tube Size	Gap
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.5"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5.375"	2	2.625"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

### Square Wave 8mm

10 FPI or 7.5 FPI

15mm or .5938" tube centres




Core Thickness	Rows	Tube Size	Gap
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.5"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5.375"	2	2.625"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

### Dimpled 10mm

8 FPI

17mm or .6562" tube centres




Core Thickness	Rows	Tube Size	Gap
1.625"	1	1.625"	-
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.625"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5.375"	2	2"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

### Louvered 10mm

12 FPI

17mm or .6562" tube centres

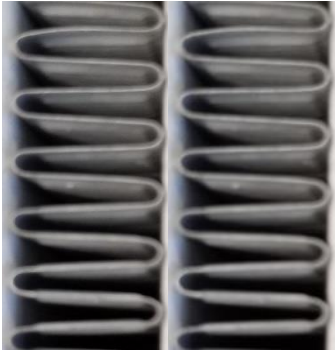

Core Thickness	Rows	Tube Size	Gap
1.625"	1	1.625"	-
2"	1	2"	-
2.625"	1	2.625"	-
3"	1	3"	-
3.5"	2	1.625"	0.25"
4.125"	2	2"	0.125"
4.5"	2	2"	0.5"
5.375"	2	2"	1"
5.5"	2	2.625"	0.25"
6.125"	2	3"	0.125"

## Headers:

### Flat:

8mm or .3125" thick



### Turn-up:

3.2mm or .125" with .5" flange

